

K8018

ILLUSTRATED ASSEMBLY MANUAL H8018IP'1



K8018W





K8018B


**3D LED CUBE
5x5x5**



velleman®
projects

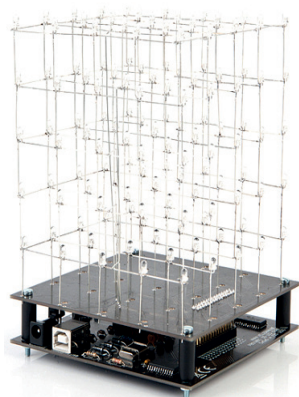

K8018B (Blue LED)



K8018W (White LED)

Connect to your computer and create
your own 3D LED effect.

Search product

Search Product

Navigation

- ▶ Main page
- ▶ Products
- ▶ Sales outlets
- ▶ Support
- ▶ Publications
- ▶ Jobs
- ▶ About us

News

NEW MK193 LED CUBE

CubeXimator software available for download here!!!

Posted on 04-06-12

[Read more...](#)

velleman
projects

Velleman Projects
All about the Velleman own
developments: Kits, Modules,
Instruments and Home automation

United Kingdom
English (UK)
Change

Velleman Projects Newsletter

Are you an electronics enthusiastic or simply interested in our kits, mini-kits, modules and instruments?

Subscribe to our Newsletter and receive every month the latest news, new products & updates on Velleman Projects.

You will receive an e-mail. Click on the link in that e-mail to confirm your subscription.

Email:



Do you want to unsubscribe? Click on the 'unsubscribe' link in the footer of the last received newsletter from Velleman Projects.

- velleman.eu
- hqpowers.eu
- perel.eu
- vellemanprojects.com
- velbus.eu
- forum.velleman.eu

Advertisements

- DAC1
- DAC2
- AI
- K8055(N) / VM110(N)
- Android Application



Subscribing our newsletter?, visit www.vellemanprojects.eu

velleman
projects

INSTRUMENTS
and
KITS
www.velleman.eu

Support Forum (EN/FR)
Velleman Projects

Login Register

FAQ Search

It is currently Fri Sep 14, 2012 1:50 pm

View unanswered posts | View active topics

Board index

All times are UTC

	Example	Topics	Posts	Last post
General				
Forum rules / Règlements du forum				
Read First! A lire en premier lieu		2	2	Wed Dec 06, 2006 10:44 am velleman
Forum administration		1	4	Thu May 03, 2012 1:22 pm VL468
Velleman 10 Minute Forum Discussions				
Vellema				
Vellema Home Automation				
Special section for our new Vellema Home Automation System (domotica)				
Kits (Endorsing projects - Projects à soutenir)				
General				
For other topics, general tips and tricks, new ideas				
Audio Hi-Fi Projects				
All audio related projects, amplifiers, valve amplifiers				
PC Related Projects				
For projects that are connected to the PC via interface cards				
Microcontroller Programmer - Experimenting Projects				
Here you can discuss PIC programming, example soft...				
Timers and Clocks				
All about our time related projects from regular clocks to programmable timers				
Home Projects				
Household related projects, from light drivers to remote control				

**View
Forum**



Participate our Velleman Projects Forum



**Expert soldering
skills required!**



It is advised to start with the
mini 3D LED cube MK193.
View the assembly movie of
MK193 as guideline for
assembly of the LEDs.


**View
Assembly**



Build your 3D led cube and created unlimited 3D effects. The unit comes standard loaded with effects. Connect to your computer (USB) and create your own!

Features

- LEDs: $5 \times 5 \times 5 = 125$ LEDs
- user programmable via USB (creation of animation/scenes)
- large amount of user programmable frames
- frames are separately dimmable
- 4 transition speeds
- available frames: 3200
- 5 levels LED dimming available
- no coding skills required
- regulated power supply: 9VDC




**Download
Software**




For software, visit www.vellemanprojects.eu


Leds and how to use them



Leds feature a specific voltage drop, depending on type and colour. Check the datasheet for exact voltage drop and rated current !



Never connect leds in parallel



How to Calculate the series resistor:

Example: operate a red led (1.7V) on a 9Vdc source.

Required led current for full brightness: 5mA (this can be found in the datasheet of the led)

$$\frac{\text{Supply voltage (V)} - \text{led voltage (V)}}{\text{required current (A)}} = \text{series resistance (ohms)}$$



$$\frac{9V - 1.7V}{0.005A} = 1460 \text{ ohm}$$

closest value :
use a 1k5 resistor

Required resistor power handling=
voltage over resistor x current passed trough resistor




$$(9V - 1.7V) \times 0.005A = 0.036W$$

a standard 1/4W resistor
will do the job

LEDs in series:

Example: 3 x red led (1.7V) on 9V battery
Required led current for full brightness: 5mA
(this can be found in the datasheet of the led)



$$\frac{\text{Supply voltage (V)} - (\text{number of leds} \times \text{led voltage (V)})}{\text{required current (A)}} = \text{series resistance (ohms)}$$




$$\frac{9V - (3 \times 1.7V)}{0.005A} = 780 \text{ ohm}$$


use an
820 ohm resistor

open collector outputs

An open collector output can be compared to a switch which switches to ground when operated



Example: How to switch an LED by means of an open collector output



assembly hints


1. Assembly (Skipping this can lead to troubles !)

Ok, so we have your attention. These hints will help you to make this project successful. Read them carefully.



1.1 Make sure you have the right tools:

- A good quality soldering iron (25-40W) with a small tip.
- Wipe it often on a wet sponge or cloth, to keep it clean; then apply solder to the tip, to give it a wet look. This is called 'thinning' and will protect the tip, and enables you to make good connections. When solder rolls off the tip, it needs cleaning.
- Thin raisin-core solder. Do not use any flux or grease.
- A diagonal cutter to trim excess wires. To avoid injury when cutting excess leads, hold the lead so they cannot fly towards the eyes.
- Needle nose pliers, for bending leads, or to hold components in place.
- Small blade and Phillips screwdrivers. A basic range is fine.



For some projects, a basic multi-meter is required, or might be handy




1.2 Assembly Hints :


- Make sure the skill level matches your experience, to avoid disappointments.
- Follow the instructions carefully. Read and understand the entire step before you perform each operation.
- Perform the assembly in the correct order as stated in this manual
- Position all parts on the PCB (Printed Circuit Board) as shown on the drawings.
- Values on the circuit diagram are subject to changes, the values in this assembly guide are correct*
- Use the check-boxes to mark your progress.
- Please read the included information on safety and customer service

* Typographical inaccuracies excluded. Always look for possible last minute manual updates, indicated as 'NOTE' on a separate leaflet.

1.3 Soldering Hints :


1. Mount the component against the PCB surface and carefully solder the leads
2. Make sure the solder joints are cone-shaped and shiny
3. Trim excess leads as close as possible to the solder joint



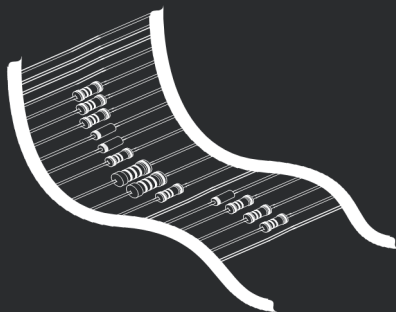


REMOVE THEM FROM THE TAPE ONE AT A TIME !

Included in
this kit




2. RESISTOR




COLOUR	COLOUR NAME	1ST DIGIT/ STRIPE	2ND DIGIT/ STRIPE	3RD DIGIT/ STRIPE	MULTIPLIER STRIPE	TOLERANCE
Black	BLACK	0	0	0	x1	1%
Brown	BROWN	1	1	1	x10	
Red	RED	2	2	2	x100	
Orange	ORANGE	3	3	3	x1.000	
Yellow	YELLOW	4	4	4	x10.000	
Green	GREEN	5	5	5	x100.000	
Blue	BLUE	6	6	6	x1.000.000	

DO NOT BLINDLY FOLLOW THE ORDER OF THE COMPONENTS ONTO THE TAPE. ALWAYS CHECK THEIR VALUE ON THE PARTS LIST!

P8018 - TOP



1 Resistors




- ☐ R1, R2 : 2K2 (2 - 2 - 2 - B)
- ☐ R3 : 10 (1 - 0 - 0 - B)
- ☐ R4 ... R8 : 390 (3 - 9 - 1 - B)
- ☐ R9 : 4K7 (4 - 7 - 2 - B)
- ☐ R10 : 470 (4 - 7 - 0 - 0 - 1)
- ☐ R11 : 1K1 (1 - 1 - 0 - 1 - 1)

2 Ceramic Capacitors



3 SMD IC




4 Diodes (Check polarity!)



5 Quartz crystal



6 IC socket




7 LED



8 Push buttons



9 Ceramic Capacitors



10 Female Header



11 Transistors




12 DC-Jack



13 USB connector




14 Electrolytic capacitors




- C9 : 4,7 μ F
- C13 : 100 μ F
- C14 : 10 μ F
- C1 : 470 μ F

15 Voltage regulator





13 IC



P8018 - BOTTOM

MOUNT ON TOP-OVERLAY SIDE




ASSEMBLY OF THE LEDs




View the assembly movie of MK193 as guideline for assembly of the LEDs.


Step 1 X 100

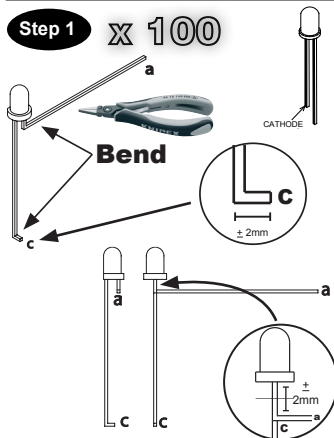



Step 2 X 20

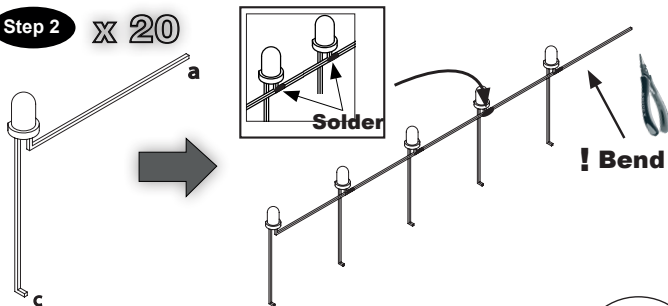


Step 3 X 4

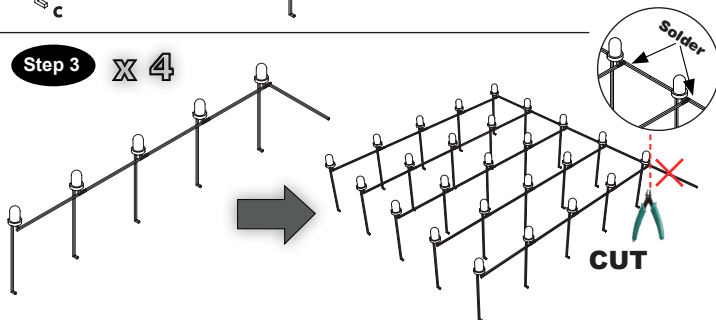


Step 4 X 1




Step 5 X 25

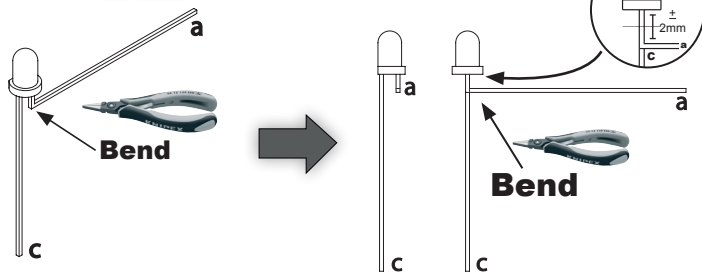


Step 6 X 5

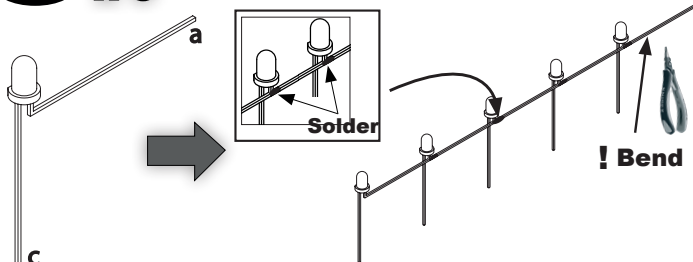


Step 7 X 1

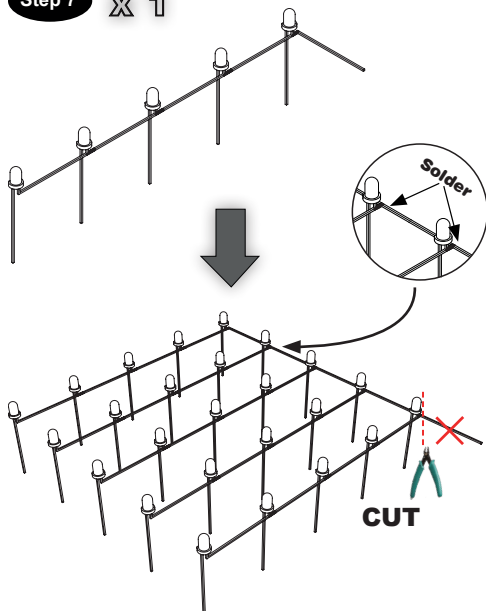


Step 8 X 1

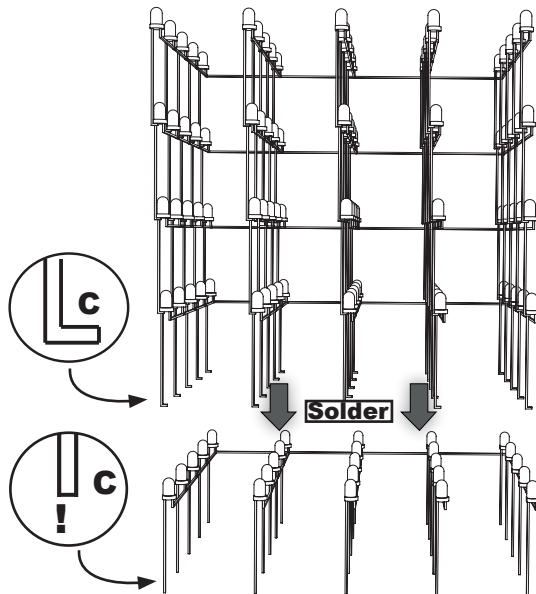


Step 9

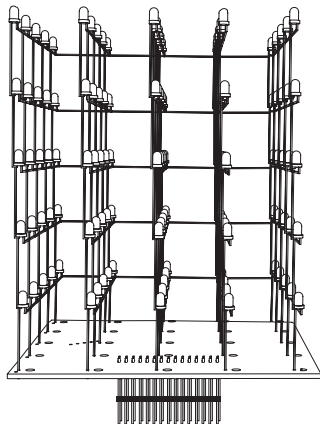

Step 10

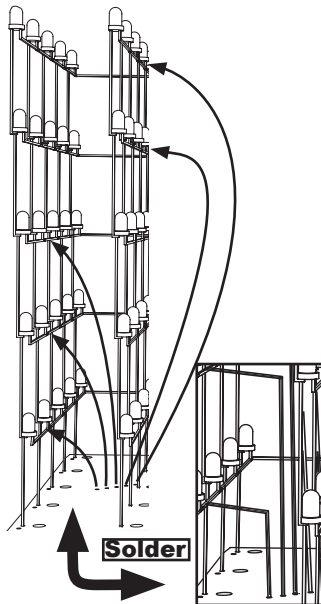


Step 11

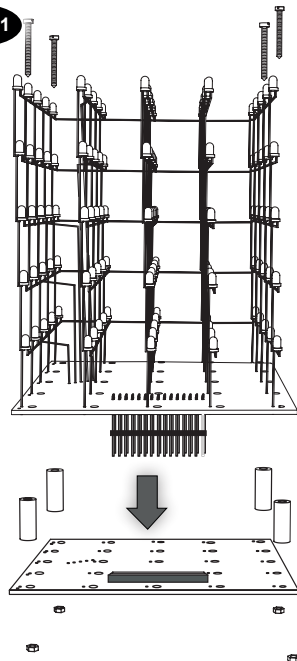




For software, visit www.vellemanprojects.eu


Download the LEDcube software on our website www.velleman.eu




Create, edit or remove your own animation

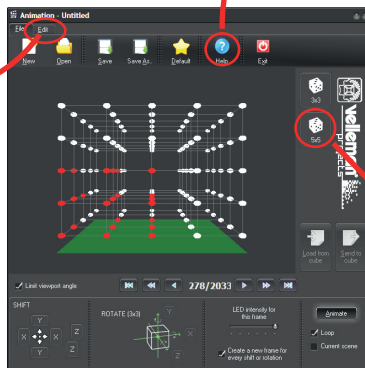


Help instructions

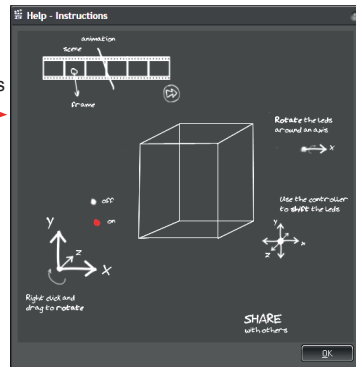

Choose 5x5 to send or read the animations of your 5x5x5 LED cube.

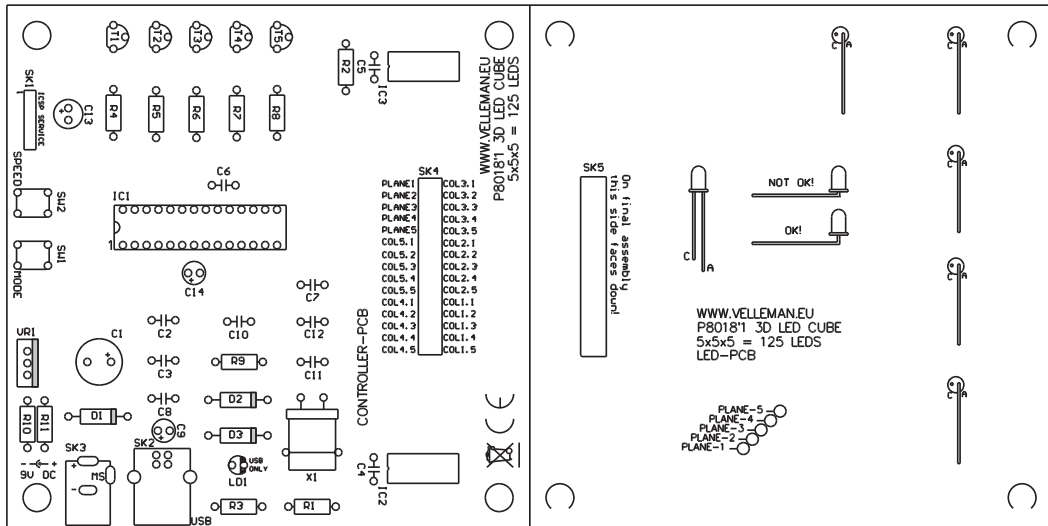

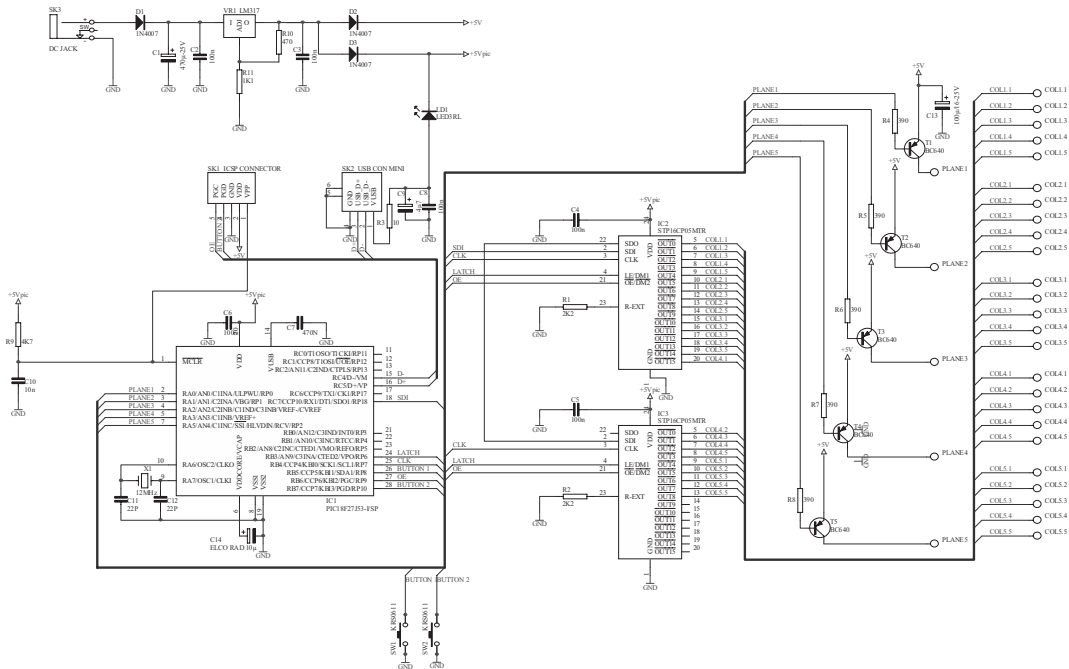



The new Velleman Projects catalogue is
now available. Download your copy here:

www.vellemanprojects.eu



Modifications and typographical errors reserved - © Velleman nv. H8018'IP
Velleman NV, Legen Heinweg 33 - 9890 Gavere.